Rotary Separator

AMRS


Function:

 Cleaning granular and floury bulk material from coarse impurities such as straw particles, pieces of wood, etc. in pre-cleaning section.

Main Features:

- Having firm steel structure and bearing arrangement.
- Employing a rotating cylinder made of special perforated sheets.
- A pipe is employed on the top of the machine for sucking dust when the machine is operating.
- High Capacity

 The spiral shape of inside part of the rotating cylinder allows the impurities to be discharged smoothly.

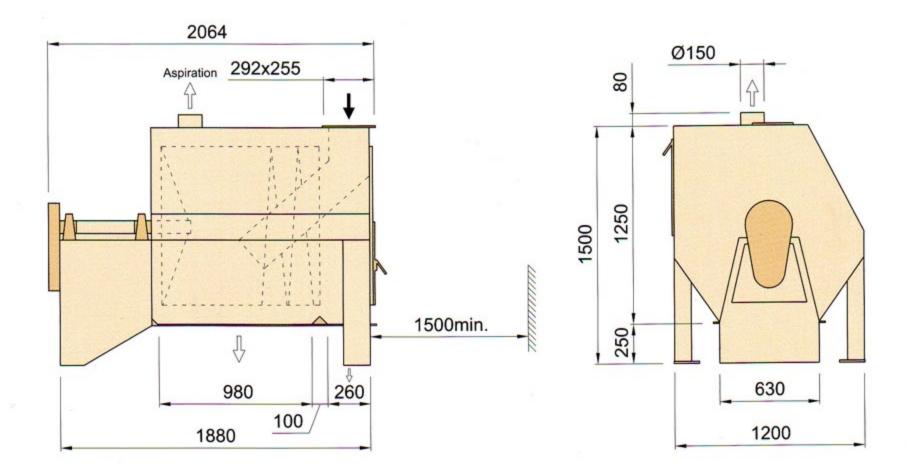

Ard Machine Rotary Separator

Туре	Capacity max. [t/h]	Motor (50 Hz) [kW]	Aspiration [m³/min]	Net weight [kg]	Shipping volume [m³]
AMRS 100/100	100	0.75	20	850	4.9

- The geared motor also operates utilizing power supply of 60 Hz.

Head office: Vali-e-Asr Ave. No.1050/6 - Seventh Floor No.702 - Post Code: 14338 - Tehran - Iran Tel.: +98 21 88713695 & 7 Fax: +98 21 88713685

Factory: Qazvin Industrial Zone Tel.: +98 282 2223029 Fax: +98 282 2223019 E-mail: info@ardmachine.com Web Site: www.ardmachine.com